

Xactics

Heat Insulation Container 1001

1401 compared to the conventional type, a small minority stocker for delivery around.

Features

- The rigid polyurethane foam insulation (80mm thick or more)
- The rugged molded polyethylene unity does not rust
- Insulated excellent performance
- High-intensity performance can be tiered
- Long-term protection from UV rays
- Flush mounted and recessed fasteners
- Can be cleaned structure for the sanitary
(Drain plug with O-ring)
- Built-in palettes (Can be inserted from four directions)
- Standard Color : Gray
- (Other colors can be selected by lot)




Option : Inner lid
Caster base

Size

- External Size :1,070L x 610W x 710H (mm)
- Inside Dimension :940L x 510W x 560H (mm)
- Vessel weight :49kg
- Capacity :283L
- Dry ice capacity : Pellet dry ice 230kg

Dry ice sublimation rate graph

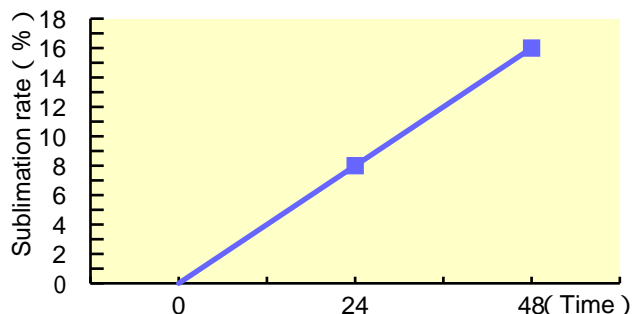

Test Date
Oct. 31 - Nov. 2, 2002
High temperatures 18
Minimum temperatures 11
In the capacity of dry ice
Pellet dry ice (9mm) 230kg



CO2Air,Inc ·Xactics,Inc
Exclusive distributor in Japan

Dryice Service Corporation

595-1 Tonodaicho Wakaba-ku,
Chiba city, Chiba 264-0036, Japan
TEL:+81-43-255-5640 FAX:+81-43-255-8780
E-mail:Shiozaki@dryice-service.co.jp
<http://dryice-service.co.jp/>