


BAC 420



Features	BAC 420
Outer dimensions in mm	1200 W x 800 D x 1050 H
Inner dimensions in mm	1000 W x 600 D x 700 H
Volume	420 liters
K value	0,27 W/m ² .K
Weight	90 Kg
Insulation material	Expanded polyurethane foam
Material of the walls	Rotomoulded polyethylene

Specifications and optional equipment

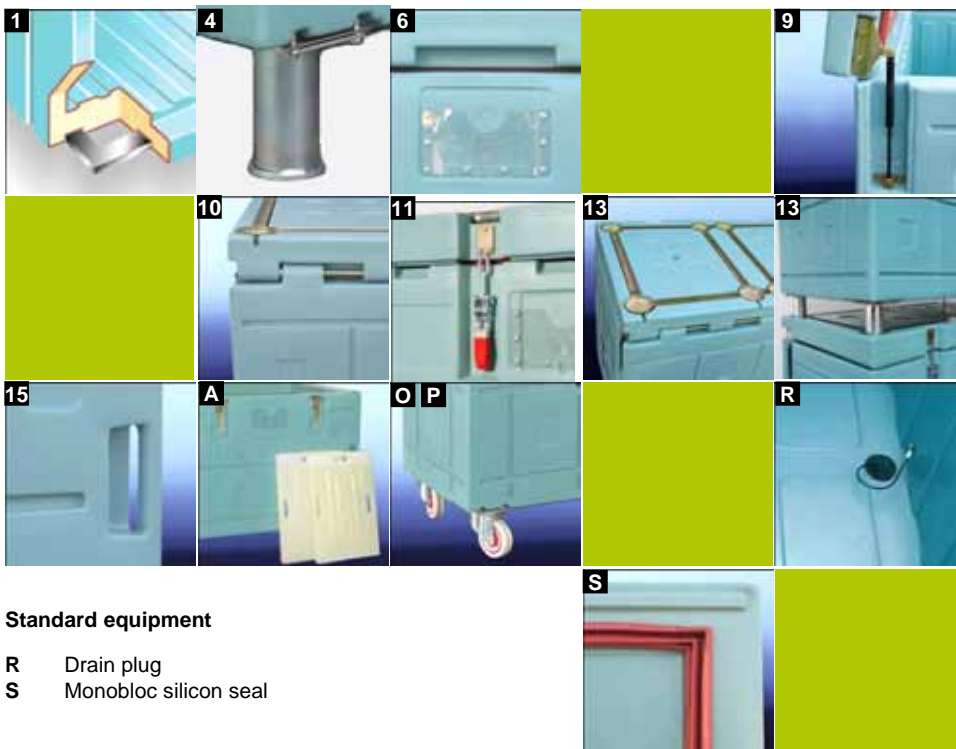

Technical features

- 1 Body and door made of one piece rotomoulded polyethylene. Insulation with CFC free expanded polyurethane foam.
- 4 Rustproof treated steel frame, flush mounted, fitted with 4 metal feet ø 80 mm
- 6 Label holder
- 9 Lid fitted with 2 hinges with gas jacks for a 80° lid opening
- 10 Hinging from moulding with metallic axle.
- 11 Flush mounted and recessed fastener
- 13 Stackable Bac 420 on metal feet and lid fitted with stacking locations.
- 15 Integrally moulded handles

Standard equipment

- R Drain plug
- S Monobloc silicon seal

Optional equipment

- A Eutectic plate TOP 900
- O Castor base fitted with 2 fixed and 2 swivelling wheels ø 125 mm with brake
- P Castor base fitted with 4 swivelling wheels ø 125 mm, 2 with brake



CO2Air, Inc • Xactics, Inc
Exclusive distributor in Japan

Dry Ice Service Corporation

595-1 Tonodaicho Wakaba-ku,
Chiba city, Chiba 264-0036, Japan
TEL:+81-43-255-5640 FAX:+81-43-255-8780
E-mail:Shiozaki@dryice-service.co.jp
<http://dryice-service.co.jp/>